

# DH-IPC-HFW1230TL2-S5

## 2 MP Lite Fixed-Focal Bullet Network Camera



### Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

### Functions

#### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

#### Smart Illumination

Dahua Smart Illumination technology can display image in the environment of low illuminance or completely dark environment. According to the distance of the targets, the camera adjusts illuminations intensity automatically to display the details of the moving target.

#### Motion Detection

When moving objects appear in the monitoring image, Dahua Motion Detection technology triggers alarm or records.

#### Image Flip

For narrow and long scenes, Dahua image flip technology flips the image by 90°/180°/270° to realize better surveillance in rotation mode.

- 2-MP 1/2.8" CMOS image sensor, low illuminance, high image definition.
- Outputs max. 2 MP (1920 × 1080) @25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in efficient IR illuminator, and the max. illumination distance is 30 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, and illegal access.
- 12 VDC/PoE power supply.
- IP67 protection.



### Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

### Protection (IP67, Wide Voltage)

**IP67:** The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

**Wide voltage:** The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

### Technical Specification

#### Camera

|                            |   |
|----------------------------|---|
| Image Sensor               | 1/2.8" CMOS   |
| Max. Resolution            | 1920 (H) × 1080 (V)   |
| ROM                        | 16 MB   |
| RAM                        | 64 MB   |
| Scanning System            | Progressive   |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s   |
| Min. Illumination          | 0.01 lux@F2.0 (Color,30 IRE)<br>0.001 lux@F2.0 (B/W,30 IRE)<br>0 lux (Illuminator on) |
| S/N Ratio                  | > 56 dB   |
| Illumination Distance      | Up to 30 m (98.4 ft) (IR)   |
| Illuminator On/Off Control | Auto; manual  |
| Illuminator Number         | 2 (IR LED)  |
| Pan/Tilt/Rotation Range    | Pan: 0°–360°<br>Tilt: 0°–90°<br>Rotation: 0°–360°                                     |

#### Lens

|                      |  |                   |                  |                 |                 |
|----------------------|--|-------------------|------------------|-----------------|-----------------|
| Lens Type            | Fixed-focal  |                   |                  |                 |                 |
| Lens Mount           | M12  |                   |                  |                 |                 |
| Focal Length         | 3.6 mm   |                   |                  |                 |                 |
| Max. Aperture        | 3.6 mm: F2.0   |                   |                  |                 |                 |
| Field of View        | 3.6 mm: Horizontal: 84°; Vertical: 45°; Diagonal: 100° |                   |                  |                 |                 |
| Iris Control         | Fixed  |                   |                  |                 |                 |
| Close Focus Distance | 3.6 mm: 0.8 m (2.6 ft)                                 |                   |                  |                 |                 |
| DORI Distance        | Lens   | Detect            | Observe          | Recognize       | Identify        |
|                      | 3.6 mm   | 49.7 m (163.1 ft) | 19.9 m (65.3 ft) | 9.9 m (32.5 ft) | 5.0 m (16.4 ft) |

#### Video

|                   |   |
|-------------------|---|
| Video Compression | H.265; H.264; H.264B; 264H; MJPEG (Only supported by the sub stream)  |
| Smart Codec       | Smart H.265+; Smart H.264+  |
| Video Frame Rate  | Main stream:<br>1920 × 1080@1–25/30 fps<br>Sub stream:<br>704 × 576@1–25 fps<br>704 × 480@1–30 fps<br>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |
| Stream Capability | 2 streams   |
| Resolution        | 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)   |
| Bit Rate Control  | CBR/VBR   |
| Video Bit Rate    | H.264: 32 kbps–6144 kbps<br>H.265: 12 kbps–6144 kbps  |

|                          |   |
|--------------------------|---|
| Day/Night                | Auto (ICR)/Color/B/W  |
| BLC                      | Yes   |
| HLC                      | Yes   |
| WDR                      | DWDR  |
| White Balance            | Auto; natural; street lamp; outdoor; manual; regional custom        |
| Gain Control             | Manual; auto  |
| Noise Reduction          | 3D NR   |
| Motion Detection         | OFF/ON (4 areas, rectangular)                                       |
| Region of Interest (RoI) | Yes (4 areas)   |
| Smart Illumination       | Yes   |
| Image Rotation           | 0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower) |
| Mirror                   | Yes   |
| Privacy Masking          | 4 areas   |

#### Alarm

|             |   |
|-------------|---|
| Alarm Event | Network disconnection; IP conflict; illegal access; motion detection; video tampering; security exception |
|-------------|---|

#### Network

|                     |   |
|---------------------|---|
| Network Port        | RJ-45 (10/100 Base-T)   |
| SDK and API         | Yes   |
| Cyber Security      | Video encryption; Configuration encryption; Digest; WSSE; Account lockout; Security logs; Generation and importing of X.509 certification; Trusted boot; Trusted execution; Trusted upgrade |
| Network Protocol    | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP  |
| Interoperability    | ONVIF(Profile S); CGI; P2P  |
| User/Host           | 6 (Total bandwidth: 36 M)   |
| Storage             | FTP   |
| Browser             | IE; Chrome; Firefox   |
| Management Software | Smart PSS; DSS; DMSS  |
| Mobile Client       | iOS; Android  |

#### Power

|                   |  |
|-------------------|--|
| Power Supply      | 12 VDC/PoE (802.3af)   |
| Power Consumption | Basic power consumption: 1.3 W (12 VDC); 2.1 W (PoE)<br>Max. power consumption (ICR + H.265+IR intensity): 2.9 W (12 VDC); 3.9 W (PoE) |

#### Environment

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | –40 °C to +55 °C (–40 °F to +131 °F) |
| Operating Humidity    | ≤ 95%                                |
| Storage Temperature   | –40 °C to +60 °C (–40 °F to +140 °F) |
| Protection            | IP67                                 |

Structure

|                    |   |
|--------------------|---|
| Casing             | plastic   |
| Product Dimensions | 198.9 mm × 80.2 mm × 76.2 mm (7.83" × 3.16" × 3.00")<br>(L × W × H) |
| Net Weight         | 0.25 kg (0.55 lb)   |
| Gross Weight       | 0.40 kg (0.88 lb)   |

Ordering Information

| Type                   | Model                | Description                                 |
|------------------------|----------------------|---|
| 2 MP Camera            | DH-IPC-HFW1230TL2-S5 | 2 MP Lite Fixed-Focal Bullet Network Camera |
| Accessories (optional) | PFA130-E             | Water-proof Junction Box                    |
|                        | PFA157               | Pole Mount Bracket                          |
|                        | PFM321D              | 12 VDC 1A Power Adapter                     |
|                        | PFM900-E             | Integrated Mount Tester                     |

Accessories

Optional:



PFA130-E  
Water-proof  
Junction Box




PFA157  
Pole Mount  
Bracket



PFM321D  
12 VDC 1A Power  
Adapter



PFM900-E  
Integrated Mount  
Tester

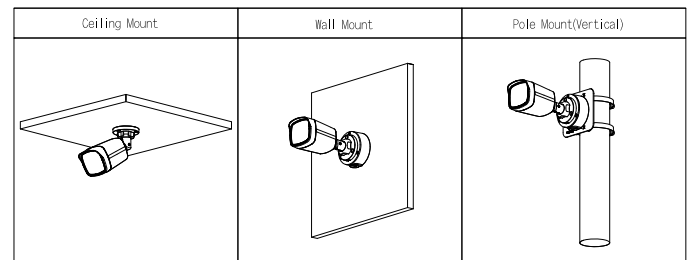

Dimensions (mm[inch])

