

## KX-S5W

### 5MP Wireless Network PT Camera

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.



#### 5MP

Clear images with sharp details



#### Smart Dual Light

Captures color details for post-event review



#### One Camera for 360° View

360° monitoring without blind spots



#### Sound and Light Alarm

Provides instant alarms to deter intruders



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### AI Vehicle Detection

Focuses on what matters and reduces false alarms



#### Two-way Talk

Communication anytime, anywhere



#### Auto Tracking

Automatic tracking of targets



#### IP66 Protection

Withstands harsh environments




#### H.265

Advanced H.265 compression technology



#### SD Card

Low-cost storage

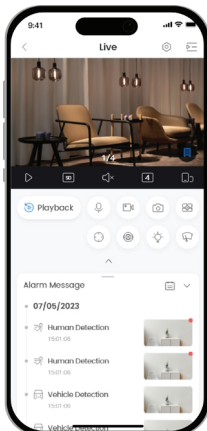

## Upgrade Your Experience with KBView Plus



GET IT ON  
Google play

Available on the  
App Store

## KX-S5W

### 5MP Wireless Network PT Camera

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.



## Specifications

### Camera

Image Sensor	1/2.8" CMOS
Pixel	5 MP
Max. Resolution	2560 (H) × 1920(V)
Electronic Shutter Speed	1 s–1/100,000 s
Illuminator Number	2 (IR light); 2 (warm light)

### Lens

Focal Length	4.0 mm
Max. Aperture	F1.6
Field of View	4.0 mm: H: 80.4°; V: 58.1°; D: 104.8°
Close Focus Distance	4.0 mm: 0.3 m (0.98 ft)

### PTZ

Pan/Tilt Range	Pan: 0° to 345°; Tilt: 0° to +80°
Preset	300

### Smart Event

IVS	Tripwire; intrusion; linkage tracking
Human Detection	Yes
SMD	SMD3.0

### Active Deterrence

Light Warning	Warm light warning; Flash duration: 5 s–30 s; Flash frequency: high, medium, low
Sound Warning	Offers 1 sound alarm and 10 custom sound alarms can be imported; Sound can be set from 0%–100%; Play times can be set from 1-10.

### Video

Video Compression	Smart H.265+;H.265;Smart H.264+;H.264B;H.264M; H.264H;MJPEG(Sub Stream 1)
Resolution	5M (2560 × 1920); 4M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 720p (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240)
Video Frame Rate	Main stream: 5M/4M/3M/1080p/1.3M/720p@ (1–25/30 fps) Sub stream 1: D1/VGA/CIF@(1–25/30 fps) Main stream: 5M/4M/3M/1080p/1.3M/720p@ (1–25/30 fps) Sub stream 1: D1/VGA/CIF@(1–25/30 fps)

Video Bit Rate	H264: 104 kbps-8,192 kbps H265: 41 kbps-8,192 kbps
Day/Night	Auto (ICR); Color/B/W
WDR	DWDR
Image Rotation	180°
<b>Audio</b>	
Audio Compression	PCM; G.711a; G.711Mu; G.726;
<b>Network</b>	
Network Port	RJ-45 (10/100 Base-T)
Wi-Fi Standard	IEEE802.11b;IEEE802.11g;IEEE802.11n
Wi-Fi Frequency Range	2.4 GHz
Storage	Micro SD card (256 GB); FTP
Browser	IE: IE 7 and later versions; Chrome; Firefox; Safari
Mobile Client	iOS;Android
<b>Power</b>	
Power Supply	12 VDC, 1 A ± 10% (included)
<b>Environment</b>	
Operating Temperature	–30 °C to +55 °C (–22 °F to +131 °F)
Operating Humidity	≤95%
<b>Structure</b>	
Product Dimensions	140.5 mm × Φ111.0 mm (5.53" × Φ4.37")
Net Weight	0.5 kg (1.10 lb)
Gross Weight	1 kg (2.20 lb)