

## 3MP Fixed-focal Wi-Fi Turret Network Camera

# DH-IPC-HDW1339DA-SW-PV



### Series Overview

Driven by industry-leading technology, Dahua Wireless Series network cameras are highly precise and easy to install, producing high-quality images. They have strong wireless connection capabilities and do not require network cables, eliminating the need for a professional construction team. This series of cost-effective cameras supports local storage and is dustproof and waterproof. It is ideal for small and medium-sized scenes such as retail stores, homes, and other small and medium-sized enterprises.



#### 3MP

Clear images with sharp details



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### AI Vehicle Detection

Focuses on what matters and reduces false alarms



#### Two-way Talk

Communication anytime, anywhere



#### Smart Dual Light

Captures color details for post-event review



#### Sound and Light Alarm

Provides instant alarms to deter intruders



#### IP67 Protection

Withstands harsh environments



#### Wi-Fi 6

Seamless integration of speed and anti-interference



#### H.265

Advanced H.265 compression technology



#### Bluetooth Pairing

Fast pairing with Bluetooth




#### DMSS App

Easy to use



#### Supports Micro SD Card

Low-cost storage

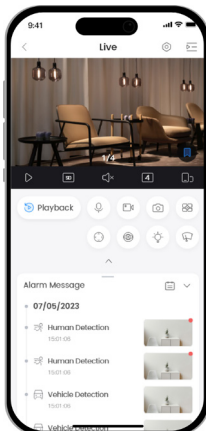

## Upgrade Your Experience with DMSS

Intuitive AIoT app for individual security



#### Remote Management

Live view and recording history



#### Easy sharing

Safer device sharing with family and friends



#### Notifications and Alerts

Accurate and timely



#### High Security

Stay secure with all data encrypted





# Specifications

## Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Min. Illumination	0.005 lux@F1.6 (Color, 30 IRE) 0.0005 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)
Illumination Distance	Up to 30 m (98.43 ft) (IR) Up to 30 m (98.43 ft) (Warm light)
Illuminator Number	1 (IR LED); 1 (Warm light)
Angle Adjustment	Pan: 0°–360° Tilt: 0°–78° Rotation: 0°–360°
Lens Type	Fixed-focal
Focal Length	2.8 mm; 3.6 mm
Max. Aperture	F1.6
Field of View	2.8 mm: H: 103°; V: 55°; D: 123° 3.6 mm: H: 85°; V: 46°; D: 100°

## Intelligence

Human Detection	Yes
Vehicle Detection	Yes

## Audio and Video

Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by sub stream)
Video Frame Rate	Main stream: 2304 × 1296@(1–25/30 fps) sub stream: 640 × 360@(1–25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Video Bit Rate	H.264: 32 kbps–6144 kbps H.265: 32 kbps–6144 kbps
Day/Night	Auto(ICR)/Color/B/W
WDR	DWDR
Image Rotation	0°/180°

Built-in MIC	Yes, built-in Mic
Built-in Speaker	Yes, built-in speaker
Audio Compression	G.711a; G.711Mu; PCM










## Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE 802.11b/g/n/ax 2.4000–2.4835 GHz, 2.4 G, EIRP≤20 dBm
Interoperability	ONVIF (Profile S & Profile G & Profile T); CGI
Wi-Fi Pairing	Bluetooth pairing
Storage	Micro SD card (support max. 256 GB)
Management Software	Smart PSS Lite; DSS; DMSS
Mobile Client	iOS; Android

## General

Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU; CE-RED: Radio Equipment Directive 2014/53/EU
Power Supply	12 VDC
Power Consumption	Basic: 2.1 W (12 VDC); Max.: 7.1 W (12 VDC) (H.265 + warm light on+ sound and light alarm)
Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	≤95% (RH), non-condensing
Protection	IP67
Camera Button	Reset button
Casing Material	Metal + plastic
Product Dimensions	102.2 mm × Φ109.9 mm (4.02" × Φ4.33")
Net Weight	0.32 kg (0.71 lb)

# What's in the box

-  × 1
- Tools:**
  -  Position Map × 1
  -  Screw Package × 1
  -  Waterproof Connector × 1
  -  Mounting Plate × 1
- Documents:**
  -  QR Code × 1
  -  Quick Start Guide × 1
  -  Legal and regulation information × 1
- Power:**
  -  Power Adapter × 1

